


elements MIC 2(MC0024)

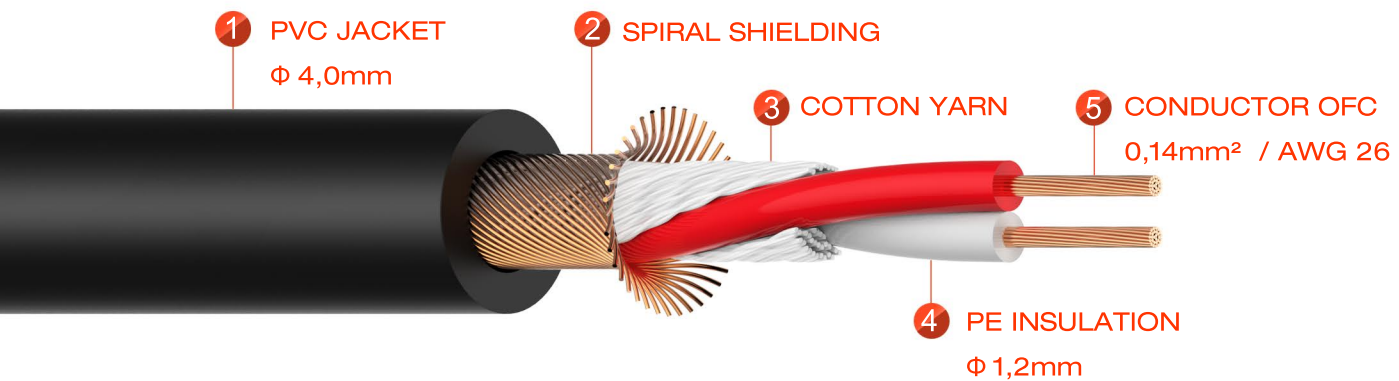

TECHNICAL DATA:

- | | |
|-------------------------------|--|
| • Jacket,diameter | PVC Φ 4,0mm |
| • AWG | 26 |
| • Copper strand per conductor | 18x0.1mm |
| • No. of inner conductors | 2x0,14mm ² |
| • Conductor insulation | PE Φ 1,2mm |
| • Shielding | copper spiral shielding with 32x0,10mm |
| • Shielding factor | 95% |
| • Temperature range | min. -20°C |
| • Temperature range | max. +70°C |

ELECTRICAL DATA:

- | | |
|-------------------------------|--------------|
| • Cond. resistance per 1 km | 140 Ω |
| • Capac. cond./cond.per 1 m | 35 pF |
| • Capac. cond./shield.per 1 m | 90 pF |